



Producto distribuido por

SDM
Oil & Gas


 (+51) 999 012777  ventas@sdm.pe

www.sdm.pe | Av. Galvez Barrenechea 274. San Isidro



Vari • Pure

*High Capacity Gas Phase Adsorbers
For effective removal of odors and gaseous
contaminants*

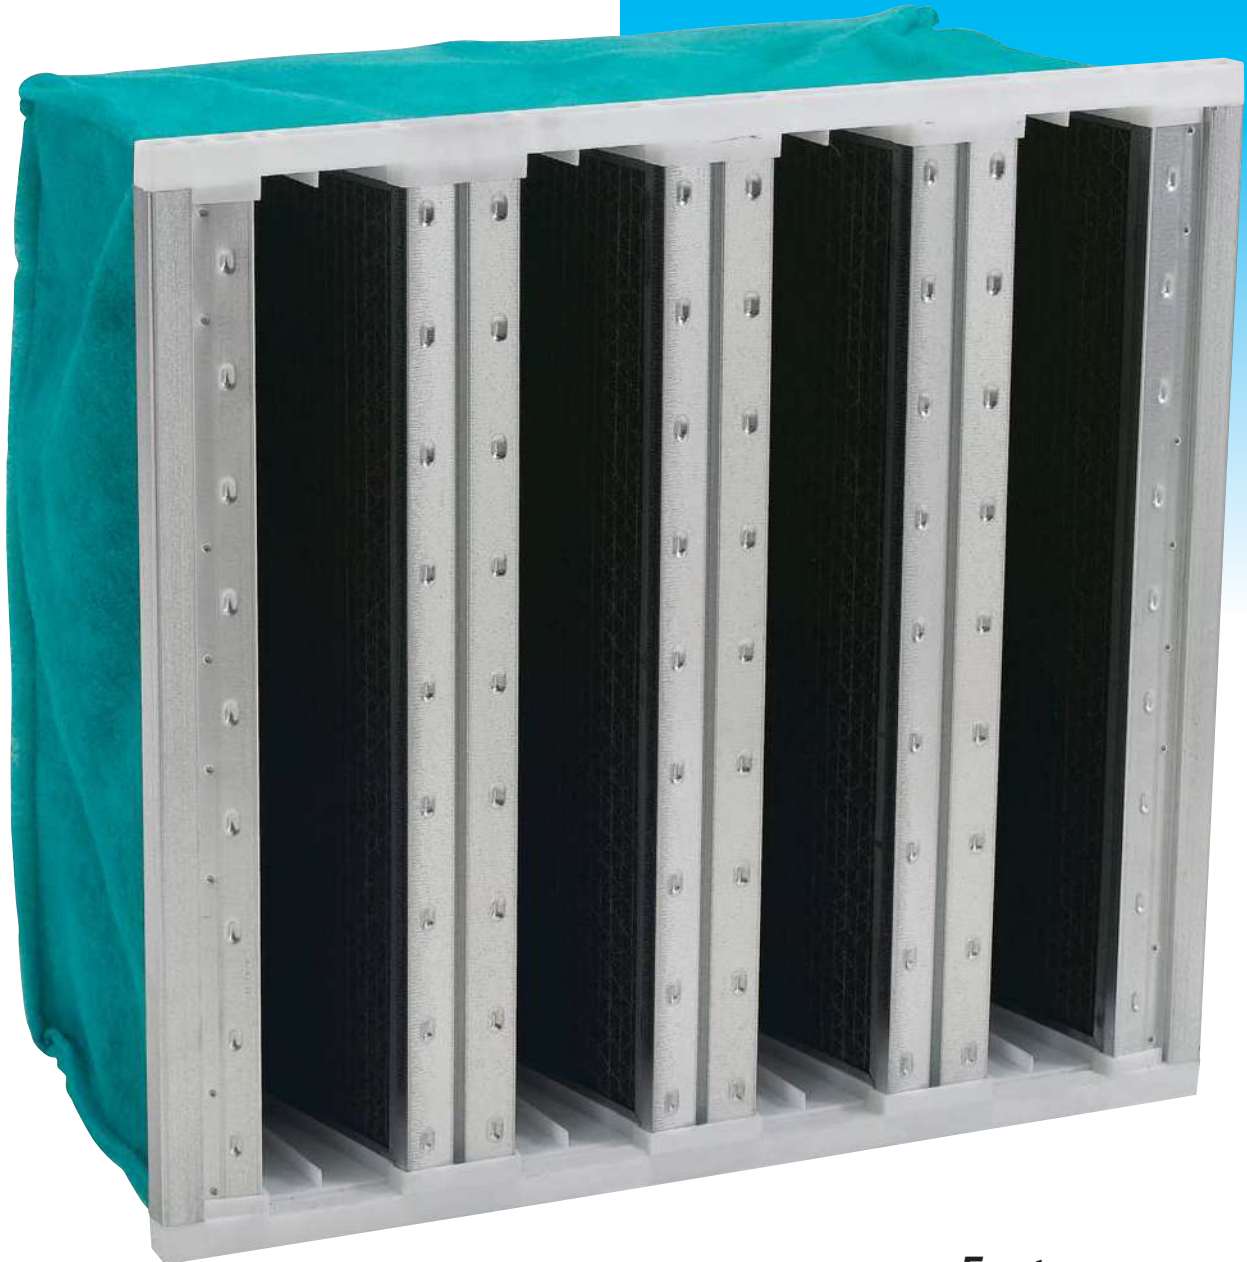

Features:

- **Highest Carbon Content**
- **Variety of Adsorbents**
- **Vari-Sock Afterfilter**

Vari•Pure

High Capacity Gas Phase Adsorbers

Applications

The Vari•Pure gas phase adsorber unit is the ideal solution for conditions requiring a high level of odor control at high flow velocity. Vari•Pure filters may be retrofitted into existing HVAC systems, specified for new construction, or used as direct replacements in original equipment manufacturer's (OEM's) air purifying units.

- Office buildings
- Hospitals
- Convalescent Homes
- Airports
- Schools and Libraries
- Industrial Plants
- Social Halls

The units have a 1" peripheral header and fit into standard built-up frame banks should have sufficient reinforcement to support the weight of carbon contained in each filter. Vari•Pure filters should always be operated with a prefilter to prevent the carbon granule pore structure from becoming plugged with particulate which would destroy their ability to collect odor compound molecules.

Vari•Pure filters are designed to operate at the same face velocity as the particulate filters in the system. No transitions are needed to increase the number of filters required for achieving the desired level of odor removal.

When the filters are fully saturated, they are easily removed and replaced with fresh units.



Choose from a Variety Adsorbents

Select from premium grade, 60% activity coconut shell carbon or specially impregnated carbons for hard to remove odors.

Standard 60% activity carbon effectively removes odors associated with diesel fumes, hydrocarbons, tobacco smoke, body odors, cooking, and volatile organic compounds (VOC's).

Specifically impregnated carbons or potassium permanganate can be selected to remove compounds such as ammonia, hydrogen sulfide, or formaldehyde.



High Carbon Content Increases Odor Removal Capacity.

Construction

Vari•Pure filters are made in a V-Bank design consisting of eight 1" deep panels fashioned into four V's. Each panel has a honeycomb structure that contains the carbon granules. A fine mesh scrim on both sides of the panel retains the granules in the honeycomb.

The extended surface, V-Bank design significantly increases the amount of carbon contained in the filter and reduces resistance to air flow.

The end caps are made of high strength, ABS plastic and the vertical support members are made of galvanized steel for a totally rigid structure.

A non-volatile, non-toxic, environmentally friendly hot melt adhesive is used to bond the honeycomb carbon panels to the end caps and steel support struts - prevents bypass.

High Activity Coconut Shell Carbon

Standard Vari•Pure filters contain 60% activity, premium grade coconut shell carbon which removes most VOC's at a capacity of 33% by weight. Premium grade coconut shell carbon is very hard and does not readily dust in service.

Vari•Pure filters are available with two carbon loadings depending on the concentration of odor present, support strength of existing racks or holding frames, and pressure drop restrictions:

Vari•Pure - Contains 26 lbs. of carbon (24" x 24" size). Used for heavier odor concentrations or longer service life.

Vari•Pure Lite - Contains 18 lbs. of carbon (24" x 24" size). Used for lighter odor concentrations or where lower resistance and less weight are required.

Vari•Sock™ Afterfilter Prevents Dusting

All Vari•Pure filters are shipped with an afterfilter as an integral component of the filter assembly. The Vari•Sock filter prevents any carbon dust from migrating downstream while enhancing particulate efficiency.



1. High Strength Plastic End Caps - Resilient ABS plastic end caps assure high integrity construction.

2. 1" Header - Vari•Pure units can be installed in built-up frame banks or side access housings.

3. Support Struts - Galvanized steel support struts on both sides of the filter ensure product rigidity.

4. High Activity Carbon - Premium grade, 60% activity coconut shell carbon offers excellent odor adsorbing characteristics. Specially impregnated carbons are also available.

5. Honeycomb Carbon Panels - The honeycomb panels containing the carbon granules are water resistant to prevent deterioration in high humidity conditions.

6. Hot Melt Adhesive - Non-volatile hot melt glue bonds the carbon panels, end caps and steel support members into a totally unitized, highly rigid unit.

7. Vari•Sock Afterfilter - Integral afterfilter prevents carbon dusting downstream. Vari•Sock filters can be purchased separately.

Vari • Pure

High Capacity Gas Phase Adsorbers



Vari•Pure activated carbon filters are designed to meet the challenge facing specifying and operating engineers to improve indoor air quality demanded by employees, tenants, customers... all occupants of commercial, industrial, educational, institutional, and residential buildings.

Gas phase adsorbers are playing an increasingly significant role in meeting building codes and specifications for HVAC systems.

Vari•Pure... *another reason why the industry looks to Airguard for leadership in Indoor Air Quality.*

Adsorptive Capacity - 60% Activity (CCl₄) Coconut Shell Carbon Partial List of Odors and Compounds

| | | | |
|-----------------|----------------|------------------------|---------------|
| Acetic Acid | Diesel Fumes | Lubricating Oils | Pet Odors |
| Adhesives | Ethyl Alcohol | Medicinal Odors | Poultry odors |
| Animal Odors | Ethyl Benzene | Methyl Ethyl Ketone | Rubber |
| Asphalt Fumes | Fertilizer | Methyl Isobutyl Ketone | Smog |
| Bathroom Smells | Fish Odors | Nicotine | Stale odors |
| Benzene | Food Aromas | Onions | Tar |
| Body Odor | Gasoline | Ozone | Tobacco Smoke |
| Burned Food | Hospital Odors | Paint Odors | Toluene |
| Cheese | Kitchen Odors | Perfumes | Varnish Fumes |

Standard Airguard carbon is rated Excellent at adsorbing all the compounds and odors listed above. To qualify for an Excellent adsorptive rating, each pound of carbon must adsorb an average of 33-1/3% of its weight in each respective compound.

For a more complete list of compounds, contact Airguard - Jeffersonville, Indiana.



Performance Data

| Model Number | Nominal Size (WxHxD) in. | Actual Size (WxHxD) in. | Initial Resistance @500 FPM | (1) Carbon Wt. per Filter | Filters per Carton | Shipping Weight |
|-------------------------|--------------------------|--------------------------|-----------------------------|---------------------------|--------------------|-----------------|
| VARI • PURE | | | | | | |
| VAR-05 | 24 x 24 x 12 | 23-3/8 x 23-3/8 x 11-1/2 | .76"W.G. | 26 | 1 | 40 |
| VAR-06 | 24 x 12 x 12 | 23-3/8 x 11-3/8 x 11-1/2 | .76"W.G. | 12 | 2 | 37 |
| VAR-15 | 24 x 20 x 12 | 23-3/8 x 19-3/8 x 11-1/2 | .76"W.G. | 21 | 1 | 33 |
| VARI • PURE LITE | | | | | | |
| VARL-05 | 24 x 24 x 12 | 23-3/8 x 23-3/8 x 11-1/2 | .33"W.G. | 18 | 1 | 32 |
| VARL-06 | 24 x 12 x 12 | 23-3/8 x 11-3/8 x 11-1/2 | .33"W.G. | 8 | 2 | 29 |
| VARL-15 | 24 x 20 x 12 | 23-3/8 x 19-3/8 x 11-1/2 | .33"W.G. | 15 | 1 | 27 |

(1) Carbon Weight is based on minimum surface area of 1100 square meters per gram of coconut shell carbon. Weight may vary due to U.S. Sieve Series and carbon density variations.

Activity Rating - Minimum 60% on carbon tetrachloride (CCl₄) at 25°C.

A-VPURE-0817

www.airguard.com

Distributed by:



100 River Ridge Circle • Jeffersonville, IN 47130
Phone: 1-866-247-4827 • Fax: 1-866-601-1809
Email: mailbag@clarcor.com • www.clclair.com

© 2017 CLARCOR Air Filtration Products.
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice.
Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com