



Producto distribuido por

SDM
Oil & Gas

 (+51) 999 012777  ventas@sdm.pe

www.sdm.pe | Av. Galvez Barrenechea 274. San Isidro

Cryogenic Lift Check Valve

Bronze

DN6 - DN50 (1/4" - 2")

Parker Bestobell lift check valves feature bolted bonnet, integral seat and renewable PTFE disc, complete with bronze internals. The bronze body valves are available with Socket Ends or BSP Parallel/NPT threaded end connections and Stainless Steel stubs. The lift check is of a cone seat design for zero leak shut off.

The bolted bonnet allows for easy maintenance, even in confined spaces with lower bolting torques.

All valves are degreased for oxygen duty, assembled in clean room conditions and pressure tested prior to dispatch.



DN25 Bronze Lift Check Valve with Stainless Steel Stubs

Maximum Working Pressure (MWP)

Subject to end connections

Up to 50 bar (725 psi) at -196°C to +65°C

Features

- Unique Parker Bestobell loose flange bolted bonnet design allows for thermal expansion and contraction and eliminates leakage at the bonnet gasket
- PTFE seal to ensure tight shut off at all times
- Designed and engineered specifically for cryogenic service
- Full bore
- Fast/easy maintenance of PTFE components

Technical

- Designed and engineered for use with Group 1 gases.
- Designed and manufactured in accordance with ASTM B31.1, BS EN 1626 and BS ISO 21011.
- Optional full material traceability backed by BS EN 10204 3.1/3.2 certification.


CE Marked according to the Pressure Equipment Directive.



DN15 Bronze Lift Check Valve with Socket Ends

Materials

	Bronze
1. Body	Gunmetal BS EN 1982 CC491K
2. Cover	Stainless Steel BS EN 10088-3 1.4401
3. Disc	HT Brass BS EN 12164 CW721R
4. Seal	Virgin PTFE
5. Gasket Bonnet	Sigma 511
6. Bonnet Flange	Stainless Steel - ASTM A351 CF8M
7. Fasteners	Stainless Steel BS6105 A2/A4 Gr.70

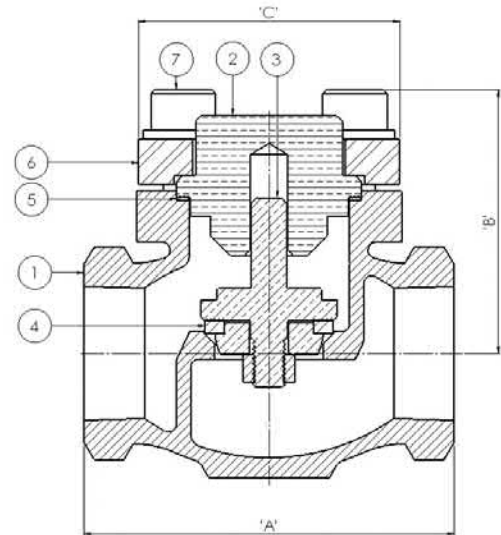

Specifications

Size	Unit	DN6 1/4"	DN10 3/8"	DN15 1/2"	DN20 3/4"	DN25 1"	DN40 1 1/2"	DN50 2"
A	mm	68	68	68	76	92	121	146
B	mm	51	51	51	60	71	84	107
C	mm	55	55	55	66	66	81	108
Cv	US GPM	3.6	3.6	3.6	6.2	13.2	26.5	43
Weight	kg	1	1	1	1.3	1.8	3.7	6.4
Opening Pressure	psi	0.37	0.37	0.37	0.37	0.37	0.24	0.21

Non Return
Check Valves

How to Order

The correct part number is easily derived from the following number sequence

CGB	10	TA	B	0	C
Series	Valve Size Diameter Nominal (DN)	Connection Type	Bonnet	Option	Seat Type
CGB Cryogenic Lift Check Bronze	10 DN6 20 DN10 30 DN15 40 DN20 50 DN25 70 DN40 80 DN50	TA BSP-PL TE NPT SST Stainless Steel Stubs	B Bolted	0 Without Spring	C Cone

Please contact us for other options.

BESTOBELL
AQUATRONIX
SINCE / DEPUIS 1953

BEP-Bestobell
www.bestobell.com