



Producto distribuido por

**SDM**  
Oil & Gas

 (+51) 999 012777  [ventas@sdm.pe](mailto:ventas@sdm.pe)

[www.sdm.pe](http://www.sdm.pe) | Av. Galvez Barrenechea 274. San Isidro

## Breakaway - Vent Line



Parker's vent line breakaway provides an important safety feature for CNG dispensing systems. It allows the vent line hose to safely disconnect, preventing damage to the dispenser in the event of a "drive off" and allows any CNG remaining in the vent line to bleed off safely.


### Features:

- Reliable consistent performance
- Compact size
- Reusable following breakaway (with minimal inspection)

### Specifications

<b>Material</b>	Brass and Stainless Steel with Urethane Seals
<b>Forces to Actuate</b>	60/140 lbs. to disconnect

### NGVBCN2-VL Breakaway-Vent Line

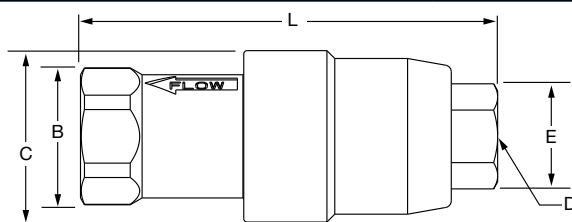

Part Number	B - Hex	C - Largest Diameter	D - Port End (2 places)	L - Connected Length
NGVBCN2-VL	1.12" (28.4 mm)	1.53" (38.9 mm)	9/16 - 18 UNF 3/8" port per SAE J1926-1	3.72" (94.5 mm)